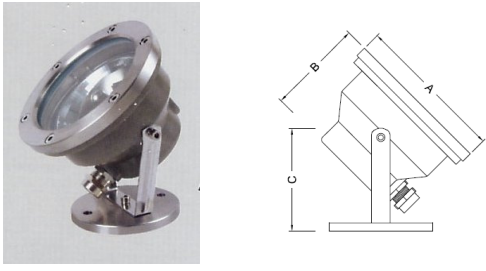
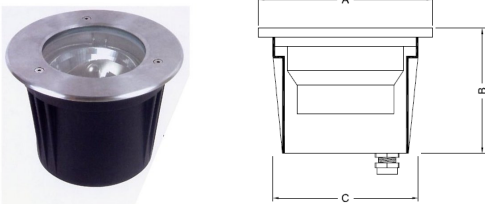


Fixture Designs & Measurements

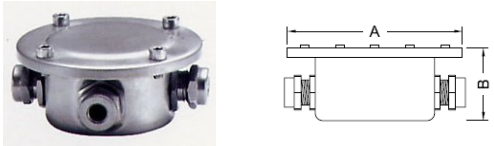

A. SURFACE MOUNTING LUMINAIRE

	Model Prefix	A	B	C
	43611	Ø150mm	90mm	86mm
	43612	Ø145mm	90mm	84mm
	45631	Ø220mm	123mm	118mm

B. IMBEDDED LUMINAIRE

	Model Prefix	A	B	C
	43632	Ø165mm	130mm	Ø145mm
	43645	Ø180mm	130mm	Ø150mm

C. SUBMERSIBLE DRIVER & CONTROL CIRCUITRY ENCLOSURE

	 <p>Stainless Steel Water Resistant Wire Connector</p>	Model Prefix	A	B
		B085	Ø85mm	40mm
		B115	Ø115mm	55mm
		B145	Ø145mm	60mm
		B175	Ø175mm	100mm

Product Range

Model Number	Description	Power (W)		Luminous Flux (lumen)		CRI
		Rated	System	Initial	Mean	
43611-04LP3	12W warm white c/w 4 LED and driver	10.20	12.00	460	414	>75
43611-04WQ5	12W cool white c/w 4 LED and driver	10.20	12.00	732	659	>75
43611-04RGB	12W single color c/w 4 LED and driver	10.20	12.00	272(R); 352(G); 104(B)		>75
43611-05LP3	15W warm white c/w 5 LED and driver	12.75	15.00	575	518	>75
43611-05WQ5	15W cool white c/w 5 LED and driver	12.75	15.00	915	824	>75
43611-05RGB	15W single color c/w 5 LED and driver	12.75	15.00	340(R); 440(G); 130(B)		>75
43611-06LP3	18W warm white c/w 6 LED and driver	15.30	18.00	690	621	>75
43611-06WQ5	18W cool white c/w 6 LED and driver	15.30	18.00	1098	988	>75
43611-06RGB	18W single color c/w 6 LED and driver	15.30	18.00	408(R); 528(G); 156(B)		>75
43612-04LP3	12W warm white c/w 4 LED and driver	10.20	12.00	460	414	>75
43612-04WQ5	12W cool white c/w 4 LED and driver	10.20	12.00	732	659	>75
43612-04RGB	12W single color c/w 4 LED and driver	10.20	12.00	272(R); 352(G); 104(B)		>75
43612-05LP3	15W warm white c/w 5 LED and driver	12.75	15.00	575	518	>75
43612-05WQ5	15W cool white c/w 5 LED and driver	12.75	15.00	915	824	>75
43612-05RGB	15W single color c/w 5 LED and driver	12.75	15.00	340(R); 440(G); 130(B)		>75
43612-06LP3	18W warm white c/w 6 LED and driver	15.30	18.00	690	621	>75
43612-06WQ5	18W cool white c/w 6 LED and driver	15.30	18.00	1098	988	>75
43612-06RGB	18W single color c/w 6 LED and driver	15.30	18.00	408(R); 528(G); 156(B)		>75
45631-09LP3	27W warm white c/w 9 LED and driver	22.95	27.00	1035	932	>75
45631-09WQ5	27W cool white c/w 9 LED and driver	22.95	27.00	1647	1482	>75
45631-09RGB	27W single color c/w 9 LED and driver	22.95	27.00	612(R); 792(G); 234(B)		>75
45631-12LP3	36W warm white c/w 12 LED and driver	30.60	36.00	1380	1242	>75
45631-12WQ5	36W cool white c/w 12 LED and driver	30.60	36.00	2196	1976	>75
45631-12RGB	36W single color c/w 12 LED and driver	30.60	36.00	816(R); 1056(G); 312(B)		>75
45631-15LP3	45W warm white c/w 15 LED and driver	38.25	45.00	1725	1553	>75
45631-15WQ5	45W cool white c/w 15 LED and driver	38.25	45.00	2745	2471	>75
45631-15RGB	45W single color c/w 15 LED and driver	38.25	45.00	1020(R); 1320(G); 390(B)		>75

Product Range

Model Number	Description	Power (W)		Luminous Flux (lumen)		CRI
		Rated	System	Initial	Mean	
43632-04LP3	12W warm white c/w 4 LED and driver	10.20	12.00	460	414	>75
43632-04WQ5	12W cool white c/w 4 LED and driver	10.20	12.00	732	659	>75
43632-04RGB	12W single color c/w 4 LED and driver	10.20	12.00	272(R); 352(G); 104(B)		>75
43632-05LP3	15W warm white c/w 5 LED and driver	12.75	15.00	575	518	>75
43632-05WQ5	15W cool white c/w 5 LED and driver	12.75	15.00	915	824	>75
43632-05RGB	15W single color c/w 5 LED and driver	12.75	15.00	340(R); 440(G); 130(B)		>75
43632-06LP3	18W warm white c/w 6 LED and driver	15.30	18.00	690	621	>75
43632-06WQ5	18W cool white c/w 6 LED and driver	15.30	18.00	1098	988	>75
43632-06RGB	18W single color c/w 6 LED and driver	15.30	18.00	408(R); 528(G); 156(B)		>75
43645-04LP3	12W warm white c/w 4 LED and driver	10.20	12.00	460	414	>75
43645-04WQ5	12W cool white c/w 4 LED and driver	10.20	12.00	732	659	>75
43645-04RGB	12W single color c/w 4 LED and driver	10.20	12.00	272(R); 352(G); 104(B)		>75
43645-05LP3	15W warm white c/w 5 LED and driver	12.75	15.00	575	518	>75
43645-05WQ5	15W cool white c/w 5 LED and driver	12.75	15.00	915	824	>75
43645-05RGB	15W single color c/w 5 LED and driver	12.75	15.00	340(R); 440(G); 130(B)		>75
43645-06LP3	18W warm white c/w 6 LED and driver	15.30	18.00	690	621	>75
43645-06WQ5	18W cool white c/w 6 LED and driver	15.30	18.00	1098	988	>75
43645-06RGB	18W single color c/w 6 LED and driver	15.30	18.00	408(R); 528(G); 156(B)		>75